



Europäisches  
Patentamt

European  
Patent Office

ML030822  
ZB/2004/050993 WO  
Office européen  
des brevets

REC'D 0.7 JUL 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03101948.2 ✓

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:

Application no.: 03101948.2 ✓

Demande no:

Anmeldetag:

Date of filing: 30.06.03 ✓

Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.

Si aucun titre n'est indiqué se référer à la description.)

Appliance, cartridge and system for personal care with auxiliary fluid

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

B26B21/44

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

**Appliance, cartridge and system for personal care with auxiliary fluid**

The invention relates to an appliance for personal care, comprising a fluid channel having an inlet opening and an outlet opening, and a coupling structure for coupling an outlet opening of a cartridge for storing an auxiliary fluid to the inlet opening of the fluid channel.

5           The invention further relates to a cartridge for use with an appliance for personal care, comprising a fluid channel having an inlet opening and an outlet opening, and a coupling structure for coupling an outlet opening of a cartridge for storing an auxiliary fluid to the inlet opening of the fluid channel, said cartridge comprising a space for storage of an auxiliary fluid, and an outlet opening for coupling the cartridge to said appliance.

10           The invention further relates to a system for personal care, comprising such an appliance for personal care, and such a cartridge.

15           An appliance, a cartridge and a system for personal care of the type described in the opening paragraph are known from WO 98/55274. The known system comprises a shaver provided with a cartridge comprising a space for holding an auxiliary fluid. The outlet opening of the cartridge can be coupled to the inlet opening of the fluid channel of the appliance. During operation, fluid is transported from the cartridge via the fluid channel towards a shaving head and thus to the contact area of the shaving head and the skin of a user. The fluid cartridge is a disposable cartridge which can be replaced with a new filled cartridge after use.

20           A disadvantage of the known appliance is that when the cartridge is disconnected from the appliance, the inlet opening of the fluid channel is left open. After use the fluid channel will contain remains of fluid, which may drip out of the fluid channel and  
25           the inlet opening after removal of the cartridge. Furthermore, the fluid channel is susceptible to contamination, and after some time the remaining fluid will dry and clog the fluid channel which hampers the fluid transport in the appliance.

It is an object of the invention to provide an improved appliance for personal care which is hygienic in use and for which a proper fluid application function is ensured. To achieve this object, an appliance for personal care according to the invention is characterized in that said coupling structure comprises a contact element with at least one orifice forming the inlet opening of the fluid channel, which contact element is connectable to the outlet opening of the cartridge, and a sealing element which is moveable relative to the contact element between a first position in which it covers the orifice and a second position in which it is released from said orifice, said sealing element comprising engagement means for engaging with means in the cartridge and moving the sealing element to the first position upon disconnection of the cartridge from the appliance.

When the outlet opening of a cartridge is connected to the coupling structure, the sealing element is in the second position and released from the orifice in the contact element. Thus the inlet opening of the fluid channel is open and ready for the passage of fluid coming from the cartridge during operation. Upon disconnection of the cartridge from the appliance, the engagement means comprised in the sealing element engage with means in the cartridge and take along the sealing element to the first position in which it covers the orifice in the contact element and thus the inlet opening of the fluid channel. In this manner the inlet opening of the fluid channel is sealed against contamination from the outside, and clogging of remaining fluid in the fluid channel is prevented.

An embodiment of an appliance for personal care according to the invention is characterized in that said engagement means for engaging with means in the cartridge are arranged for moving the sealing element to the second position upon connection of the cartridge with the appliance. Upon connection of the cartridge with the appliance, the engagement means comprised in the sealing element engage with means in the cartridge and take along the sealing element to the second position in which it is released from the orifice in the contact element.

It is advantageous when the sealing element is releasably blocked in the first position. In this manner the sealing element maintains in the first position covering the inlet opening of the fluid channel, and is not susceptible to unwanted releasing of the orifice upon movement of the appliance.

An embodiment of an appliance for personal care according to the invention is characterized in that the sealing element comprises an annular body which is slidable along an outside surface of the contact element, said engagement means comprising a collar for cooperation with protuberances in the outlet opening of the cartridge.

A further embodiment of an appliance for personal care according to the invention is characterized in that the sealing element comprises a plug which is slidable along an inner surface of the contact element, said engagement means comprising a cavity in said plug for receiving a protruding end portion provided in the outlet opening of the cartridge.

5 It is advantageous when the contact element comprises a longitudinally extending part provided with a tapered end. The outlet opening of a new, unused cartridge may comprise a seal made of foil or the like. By means of the tapered end of the contact element, this seal can be pierced upon connection of the cartridge and the coupling structure to open the outlet opening of the cartridge.

10 The invention also relates to a cartridge for use with an appliance for personal care comprising a fluid channel having an inlet opening and an outlet opening, a coupling structure for coupling an outlet opening of a cartridge for storing an auxiliary fluid to the inlet opening of the fluid channel, said coupling structure comprising a contact element with at least one orifice forming the inlet opening of the fluid channel, which contact element is connectable to the outlet opening of the cartridge, and a sealing element which is moveable relative to the contact element between a first position in which it covers the orifice and a second position in which it is released from said orifice, said sealing element comprising engagement means for engaging with means in the cartridge and moving the sealing element to the first position upon disconnection of the cartridge from the appliance, said cartridge comprising a space for storage of an auxiliary fluid, and an outlet opening for coupling the cartridge to said appliance, characterized in that the cartridge comprises means for cooperation with the engagement means of the sealing element of the coupling structure.

15 An embodiment of a cartridge according to the invention is characterized in that said means comprise protuberances for engagement with a collar of an annular body which is slidable along an outside surface of the contact element.

20 A further embodiment of a cartridge according to the invention is characterized in that said means comprise a protruding end portion for engagement with a cavity in a slidable plug provided in the contact element.

25 An embodiment of a cartridge according to the invention is characterized in that its outlet opening is provided with a closing member which is moveable out of the outlet opening upon coupling of the contact element of the coupling structure to the cartridge.

30 The invention further relates to a system for personal care, comprising a cartridge having a space for storing an auxiliary fluid and an appliance according to the invention.

The invention will be described in more detail hereinafter with reference to the drawings, in which

5                    Fig. 1 schematically shows a first embodiment of a coupling structure and a cartridge according to the invention,

                  Figs. 2a and 2b show a detail of the coupling structure and the cartridge of Figure 1 during connection,

                  Figs. 3a and 3b show a detail of the coupling structure and the cartridge of  
10    Figure 1 during disconnection,

                  Figs. 4 a and 4b show a further embodiment of a coupling structure and a cartridge according to the invention.

15                    Figure 1 shows a first embodiment of a coupling structure 7 and a cartridge 8 according to the invention. In this embodiment said coupling structure 7 is comprised in an appliance for personal care, schematically indicated by 3 in Figure 1. The appliance 3 comprises a fluid channel 4, indicated in a dotted line, having an inlet opening 5 and an outlet opening 6, and a coupling structure 7 for coupling an outlet opening 18 of the cartridge 8 for  
20    storing an auxiliary fluid to the inlet opening 5 of the fluid channel 4. This appliance for personal care may comprise for example an electric toothbrush, in which auxiliary fluid is transported from the cartridge 8 via the coupling structure 7 to the outlet opening 6 located between the bristles of the toothbrush. Via the bristles the fluid is delivered the teeth when the bristles are brought in contact with the teeth. It is noted that the appliance for personal  
25    care may also comprise any other type of appliance for personal care in which an auxiliary fluid is applied during operation, such as for example a shaver, a depilation device, a massage device, a facial treatment device, etc.. The auxiliary fluid to be used with the appliance is chosen dependent on the type of appliance for personal care, for example liquid toothpaste for a toothbrush, a shaving fluid for a shaver, or a cleansing gel for a facial treatment device.

30                    The cartridge may comprise for example a cartridge with a space formed by a flexible foil bag for holding an auxiliary fluid. However, it may for example also comprise a cartridge made from a different material. In this embodiment, the fluid channel 4 is furthermore provided with an electrically activated pump unit 2 to transport fluid from the cartridge 8 via the fluid channel 4 towards the outlet opening 6. It is noted that fluid transport

may also be realised in other ways, such as manual pumping, or by means of vibrations in the appliance drawing fluid out of the cartridge through the fluid channel to the outlet opening.

The coupling structure 7 comprises a contact element 71 with at least one orifice 75 forming the inlet opening 5 of the fluid channel 4, which contact element is connectable to the outlet opening 18 of the cartridge, and a sealing element 72 which is moveable relative to the contact element 71 between a first position in which it covers the orifice 75 and a second position in which it is released from said orifice 75, said sealing element 72 comprising engagement means 73 for engaging with means 83 in the cartridge 8 and moving the sealing element 72 to the first position upon disconnection of the cartridge 8 from the appliance 3. This will be further elucidated in Figures 2 and 3.

As can be seen in Figure 1, the contact element 71 comprises a longitudinally extending part provided with a tapered end. The outlet opening of the cartridge may be provided with a closing member which is moveable out of the outlet opening upon coupling of the contact element of the coupling structure to the cartridge, in this embodiment a seal made of foil or the like covering the outlet opening 18 of the cartridge. By means of the tapered end of the contact element, this seal can be pierced upon connection of the cartridge and the coupling structure to open the outlet opening of the cartridge. In Figure 1, the sealing element 72 is shown in the second position, in which the sealing element 72 is released from the orifice 75. In this manner an open fluid path between the cartridge 8 and the fluid channel 4 is created and the appliance is ready for operation. In this embodiment, the sealing element 72 comprises an annular body 32 which is slidable along an outside surface of the contact element 71, and said engagement means 73 comprise a collar 33 for cooperation with protuberances 34 in the outlet opening 18 of the cartridge 8.

Figure 2a shows a detail of the coupling structure 7 and the cartridge 8 during connection. In the following Figures, only the part of the cartridge that is in contact with the coupling structure is shown for clarity. It is furthermore noted that in the following description, the cartridge is moved relative to the coupling structure which is in a stationary position; it is to be understood that this movement of the cartridge relative to the stationary coupling structure in the direction of the arrows, is similar to movement of the coupling structure relative to a stationary cartridge in a direction opposite the direction of the first arrows.

Before the contact element 71 and the cartridge 8 are connected, the sealing element 72 is in the first position covering the orifice 75, and thus sealing off the inlet opening of the fluid channel 4. The sealing element is releasably blocked in this first position,

by means of which it is not susceptible to unwanted releasing of the orifice upon movement of the appliance.

The contact element 71 with the sealing element 72 is inserted in the outlet opening 18 of the cartridge 8, and the cartridge 8 is moved in the direction of the arrow.

- 5 Upon connection the collar 33 of the annular body 32 engages with the protuberances 34 of the cartridge, and the annular body is being moved away from the orifice 75 in the direction of the arrow. Upon further movement of the cartridge 8 in the direction of the arrow, the protuberances 34 slide over collar 33 and the annular body 32 is in the second position, in which it is released from the orifice 75, as can be seen in Figure 2b. A fluid path from the
- 10 space in the cartridge storing the auxiliary fluid, via the orifice 75 and the fluid path 4 through the appliance 3 (not shown here) is thus created. Upon activation of the pump unit the auxiliary fluid is transported from the cartridge via the orifice 75 and the fluid channel 4 towards the application area of the appliance, in case of a toothbrush the bristles.

- After operation of the appliance, the cartridge is emptied and needs to be
- 15 disconnected from the appliance and replaced with a new filled cartridge. This may be after one operation, or after a number of operations. Dependent on the chosen appliance and fluid, the cartridge may comprise an amount of fluid for only one use, or for a number of uses. Figure 3a shows a detail of the coupling structure 7 and the cartridge 2 during disconnection. The cartridge 8 is moved in the direction of the arrow, and the collar 33 of the annular body
- 20 32 engages with the protuberances 34 of the cartridge 8. The annular body 32 is kept in its position and thus slides relatively to the contact element towards the first position in which it again covers the orifice 75 in the contact element 71.

- Upon further movement of the cartridge 8 in the direction of the arrow, the protuberances 34 slide over the collar 33 while the annular body 32 is in the second position,
- 25 in which it covers the orifice 75, as can be seen in Figure 3b. The cartridge is then completely disconnected from the coupling element 7. Because the orifice 75 is covered by the annular body 32, the inlet opening of the fluid path 4 is sealed against contamination from the outside, and clogging of remaining fluid in the fluid channel is prevented. In this manner a correct operation of the fluid transport in the appliance is ensured upon connection of a new
- 30 cartridge. Furthermore the appliance fluid path is less susceptible to contamination which renders the appliance more hygienic. This is especially advantageous when the user waits a relatively long time before a new cartridge is attached to the appliance.

Figures 4a and 4b show a further embodiment of a coupling structure 7' and a cartridge 8' according to the invention. In this embodiment, the sealing element 72' comprises



a plug 32' which is slidable along an inner surface of the contact element 71', and the engagement means 73' comprise a cavity 33' in said plug for receiving a protruding end portion 34' provided in the outlet opening 18' of the cartridge 8'. Before the contact element 71' and the cartridge 8' are connected, the plug 32' is in a first position resting against a shoulder on the inner surface of the contact element 71', thus sealing off the inlet opening 75' of the fluid channel 4'.

Figure 4a shows a detail of the coupling structure 7' and the cartridge 8' during connection. The cartridge 8' is moved in the direction of the arrow relative to the coupling structure 7'. As shown in Figure 4b, the protruding end portion 34' engages with the cavity 33' in the plug 32', and the plug 32' is moved along the inner surface of the contact element 71' away from the inner shoulder, to release the inlet opening 75' of the fluid channel 4' and to open the fluid path between the cartridge 8' and the appliance 3'. Upon movement of the cartridge in a direction opposite the direction of the arrow, in order to disconnect the cartridge from the coupling structure 7', the protruding end portion 34' takes along the plug 32' in this opposite direction. The plug 32' then engages with the inner shoulder and seals off the inlet opening of the fluid channel again, and the protruding end portion 34' becomes disengaged from the cavity 33' in the plug 32'.

Because the inlet opening 75' is closed by the plug 32', the inlet opening of the fluid path 4 is sealed against contamination from the outside, and clogging of remaining fluid in the fluid channel is prevented when no cartridge is connected to the appliance. In this manner a correct operation of the fluid transport in the appliance is ensured upon connection of a new cartridge. Furthermore the appliance fluid path is less susceptible to contamination which renders the appliance more hygienic.

It is noted that the cartridge may be removably mounted inside the body of the appliance for personal care, such as for example in the handle of an electronic toothbrush. The cartridge may however also be located on an outside surface of the body of the appliance.

It is furthermore noted that because the coupling structure comprises a contact element with at least one orifice forming the inlet opening of the fluid channel, which contact element is connectable to the outlet opening of the cartridge, and a sealing element which is moveable relative to the contact element between a first position in which it covers the orifice and a second position in which it is released from said orifice, said sealing element comprising engagement means for engaging with means in the cartridge and moving the sealing element to the first position upon disconnection of the cartridge from the appliance,

the above described advantage of sealing off the inlet opening of the fluid path when no cartridge is attached, is achieved.

An additional advantage is that because of the cooperation between the engagement means of the sealing element and the means in the cartridge, possible connection of unsuitable cartridges can be avoided. The use of an auxiliary fluid in conjunction with an appliance for personal care imposes special requirements on said fluid. The auxiliary fluid should be suitable for the desired treatment with the appliance, and the chemical composition of the fluid should not have a negative affect on the user nor on the appliance. It is therefore important that only cartridges with fluids that are tested in conjunction with the appliance are used with the appliance. This is achieved by an appliance, a cartridge and a system according to the invention, in which only specific cartridges with the correct means are suitable to engage with the engagement means of the sealing element of the coupling structure of the appliance to open and close the fluid path. In the described embodiments this is realised by a collar on the sealing element for cooperation with protuberances provided in the outlet opening of the cartridge, and a plug in the sealing element with a cavity for receiving a protruding end portion provided in the outlet opening of the cartridge. It is noted however that the engagement means comprised in the sealing element for engagement with means in the cartridge are not limited to the described embodiments, and could also comprise other types or combinations of means, such as for example an annular body forming the sealing element and cooperating with snap hooks in the outlet opening of the cartridge.

## CLAIMS:

1. An appliance (3) for personal care, comprising:  
a fluid channel (4) having an inlet opening (5) and an outlet opening (6);  
a coupling structure (7) for coupling an outlet opening (18) of a cartridge (8) for storing an auxiliary fluid to the inlet opening (5) of the fluid channel (4),  
5 characterized in that said coupling structure (7) comprises:  
a contact element (71) with at least one orifice (75) forming the inlet opening (5) of the fluid channel (4), which contact element (71) is connectable to the outlet opening (18) of the cartridge (8), and  
a sealing element (72) which is moveable relative to the contact element (71) between a first  
10 position in which it covers the orifice (75) and a second position in which it is released from said orifice (75), said sealing element (72) comprising engagement means (73) for engaging with means (83) in the cartridge and moving the sealing element (72) to the first position upon disconnection of the cartridge (8) from the appliance (3).
- 15 2. An appliance for personal care as claimed in claim 1, characterized in that said engagement means (73) for engaging with means (83) in the cartridge (8) are arranged for moving the sealing element (72) to the second position upon connection of the cartridge (8) with the appliance (3).
- 20 3. An appliance for personal care as claimed in claim 1, characterized in that the sealing element (72) is releasably blocked in the first position.
4. An appliance for personal care as claimed in claim 1, characterized in that the sealing element (72) comprises an annular body (32) which is slidable along an outside  
25 surface of the contact element (71), said engagement means (73) comprising a collar (33) for cooperation with protuberances (34) provided in the outlet opening (18) of the cartridge.
5. An appliance for personal care as claimed in claim 1, characterized in that the sealing element (72) comprises a plug (32') which is slidable along an inner surface of the

contact element (71'), said engagement means (73') comprising a cavity (33') in said plug(32') for receiving a protruding end portion (34') provided in the outlet opening (18') of the cartridge (8').

5     6.             An appliance for personal care as claimed in any of the preceding claims, characterized in that the contact element (71) comprises a longitudinally extending part provided with a tapered end.

7.             An appliance for personal care as claimed in any of the preceding claims,  
10     wherein the appliance (3) is an electric toothbrush.

8.             A cartridge (8) for use with an appliance for personal care (3) comprising a fluid channel (4) having an inlet opening (5) and an outlet opening (6), a coupling structure (7) for coupling an outlet opening (18) of a cartridge (8) for storing an auxiliary fluid to the  
15     inlet opening (5) of the fluid channel (4), said coupling structure (7) comprising a contact element (71) with at least one orifice (75) forming the inlet opening (5) of the fluid channel (4), which contact element (71) is connectable to the outlet opening (18) of the cartridge (8), and a sealing element (72) which is moveable relative to the contact element (71) between a first position in which it covers the orifice (75) and a second position in which it is released  
20     from said orifice (75), said sealing element (72) comprising engagement means (73) for engaging with means (83) in the cartridge and moving the sealing element (72) to the first position upon disconnection of the cartridge (8) from the appliance (3),

              said cartridge comprising a space for storage of an auxiliary fluid, and an outlet opening (18) for coupling the cartridge (8) to said appliance (8), characterized in that  
25     the cartridge (8) comprises means (83) for cooperation with the engagement means (73) of the sealing element (72) of the coupling structure (7).

9.             A cartridge as claimed in claim 8, characterized in that said means (83) comprise protuberances (34) for engagement with a collar (33) of an annular body (32) which  
30     is slidable along an outside surface of the contact element (71).

10.            A cartridge as claimed in claim 8, characterized in that said means (83) comprise a protruding end portion (34') for engagement with a cavity (33') in a slidable plug (32') provided in the contact element (71).

11. A cartridge as claimed in claim 8, characterized in that its outlet opening (18) is provided with a closing member which is moveable out of the outlet opening (18) upon coupling of the contact element (71) of the coupling structure (7) to the cartridge (8).

5

12. A system for personal care, comprising a cartridge having a space for storing an auxiliary fluid as claimed in any of the claims 8 -11, and an appliance as claimed in any of the claims 1-7.

## ABSTRACT:

The invention relates to an appliance for personal care (3) comprising a fluid channel (4) having an inlet opening (5) and an outlet opening (6), a coupling structure (7) for coupling an outlet opening (18) of a cartridge (8) for storing an auxiliary fluid to the inlet opening (5) of the fluid channel (4), said coupling structure (7) comprising a contact element (71) with at least one orifice (75) forming the inlet opening (5) of the fluid channel (4), which contact element (71) is connectable to the outlet opening (18) of the cartridge (8), and a sealing element (72) which is moveable relative to the contact element (71) between a first position in which it covers the orifice (75) and a second position in which it is released from said orifice (75), said sealing element (72) comprising engagement means (73) for engaging with means (83) in the cartridge and moving the sealing element (72) to the first position upon disconnection of the cartridge (8) from the appliance (3).

The invention furthermore relates to a cartridge (8) for use with an appliance for personal care (3), said cartridge comprising a space for storage of an auxiliary fluid, and an outlet opening for coupling the cartridge to said appliance, wherein the cartridge comprises means (83) for cooperation with the engagement means (73) of the sealing element (72) of the coupling structure (7), and to a system comprising such an appliance and such a cartridge.

Fig. 1

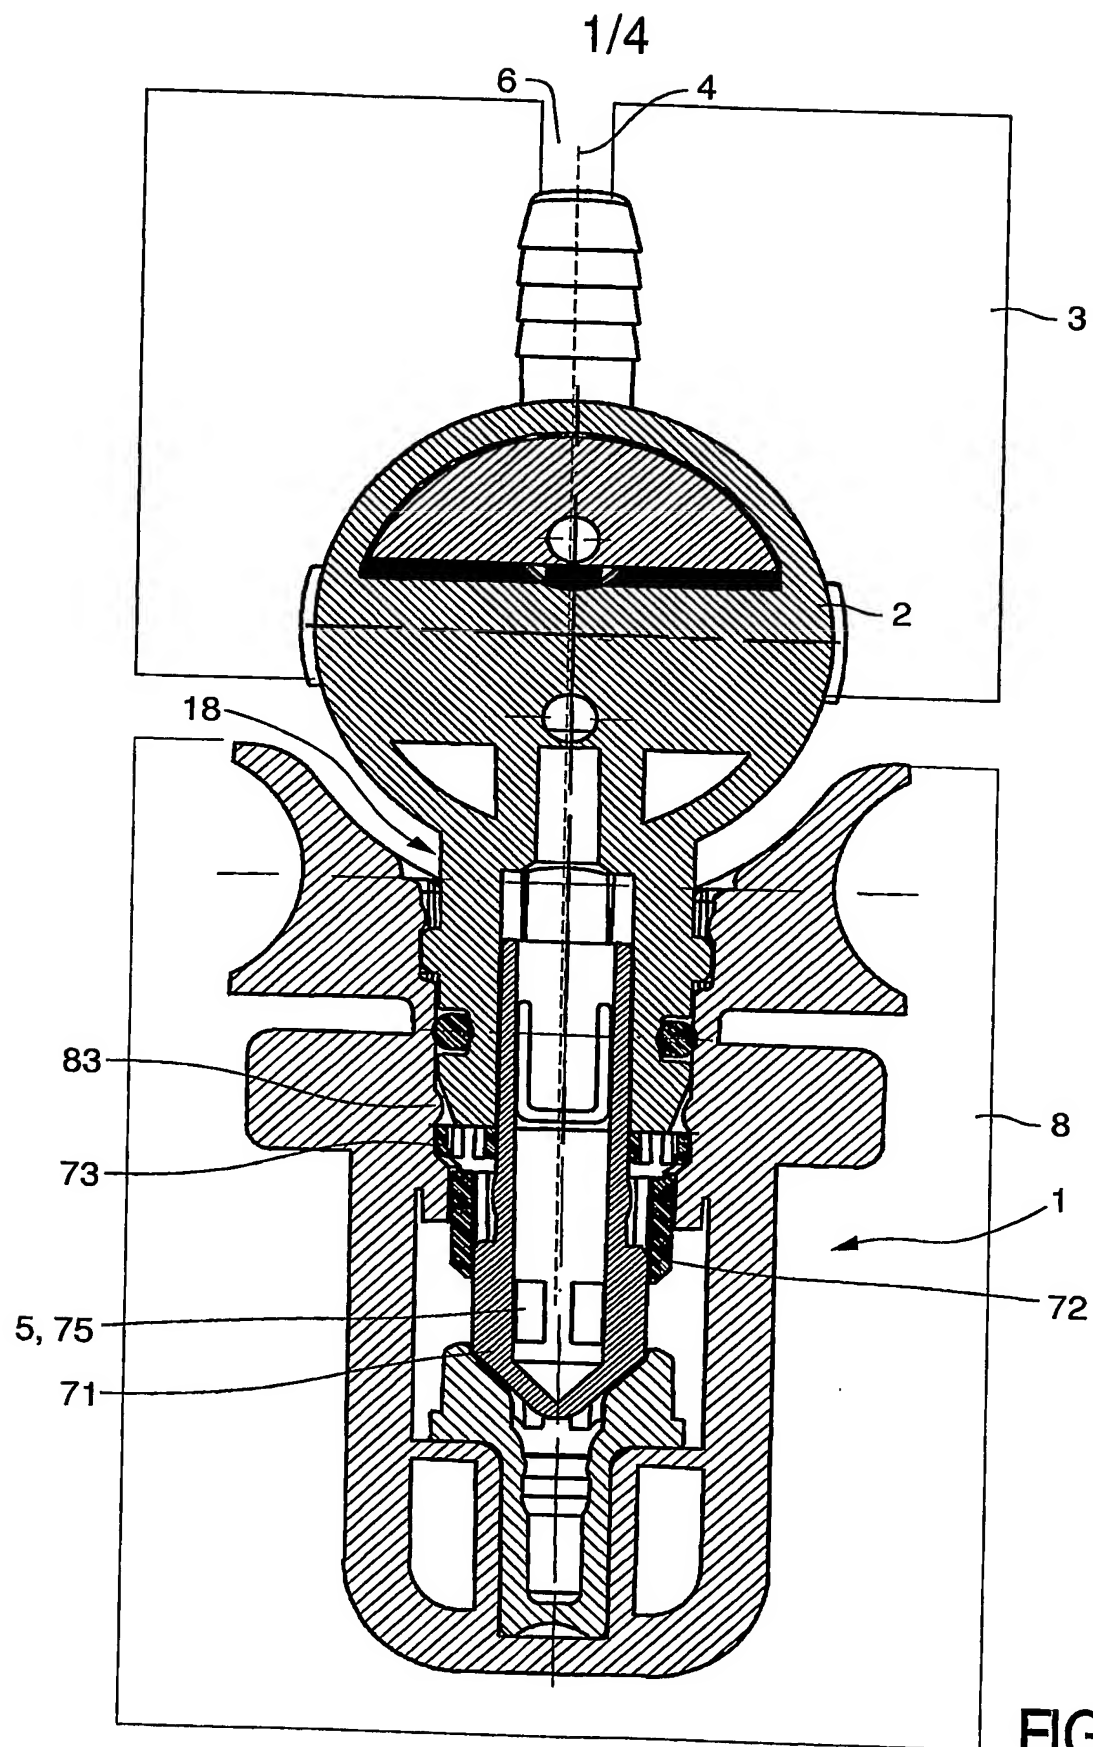


FIG. 1

2/4

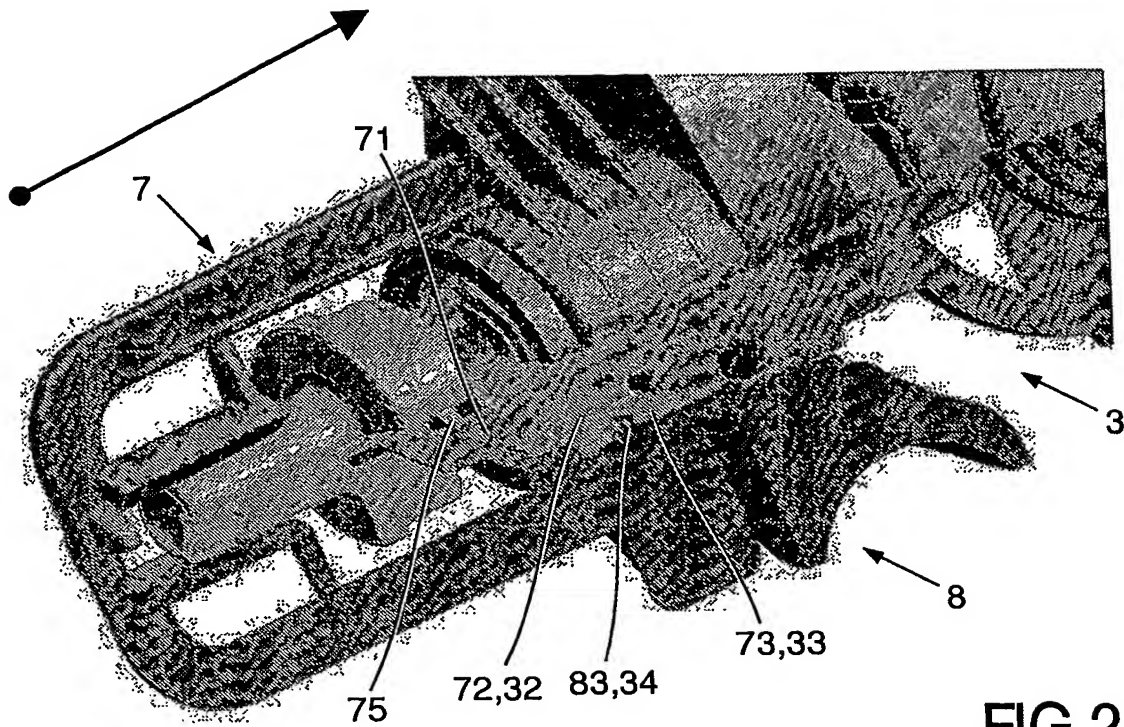


FIG. 2a

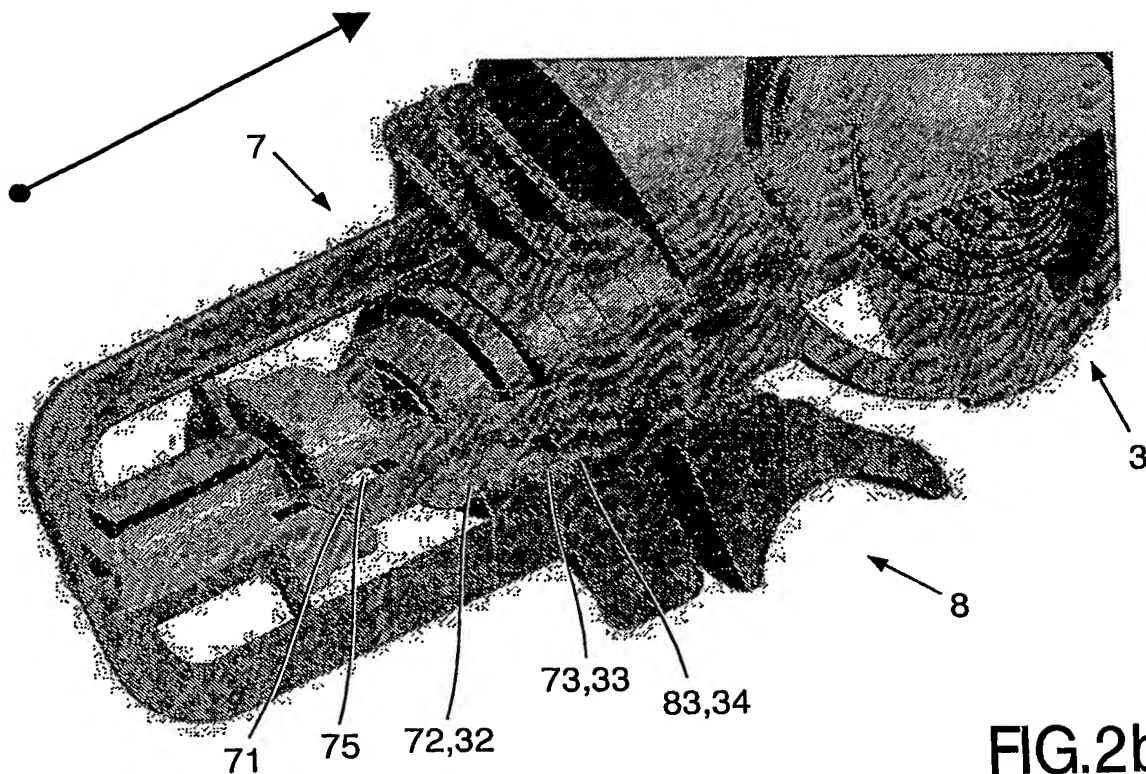


FIG. 2b

Best Available Copy

Best Available Copy



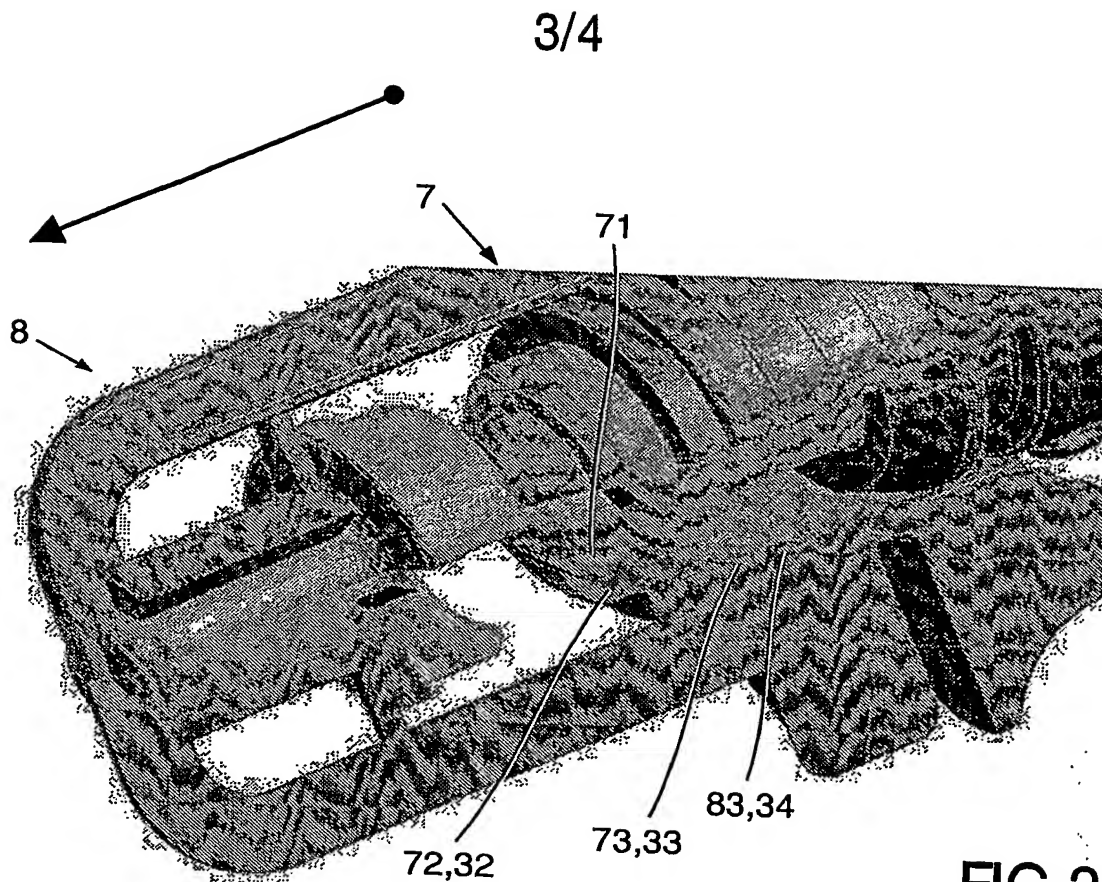


FIG. 3a

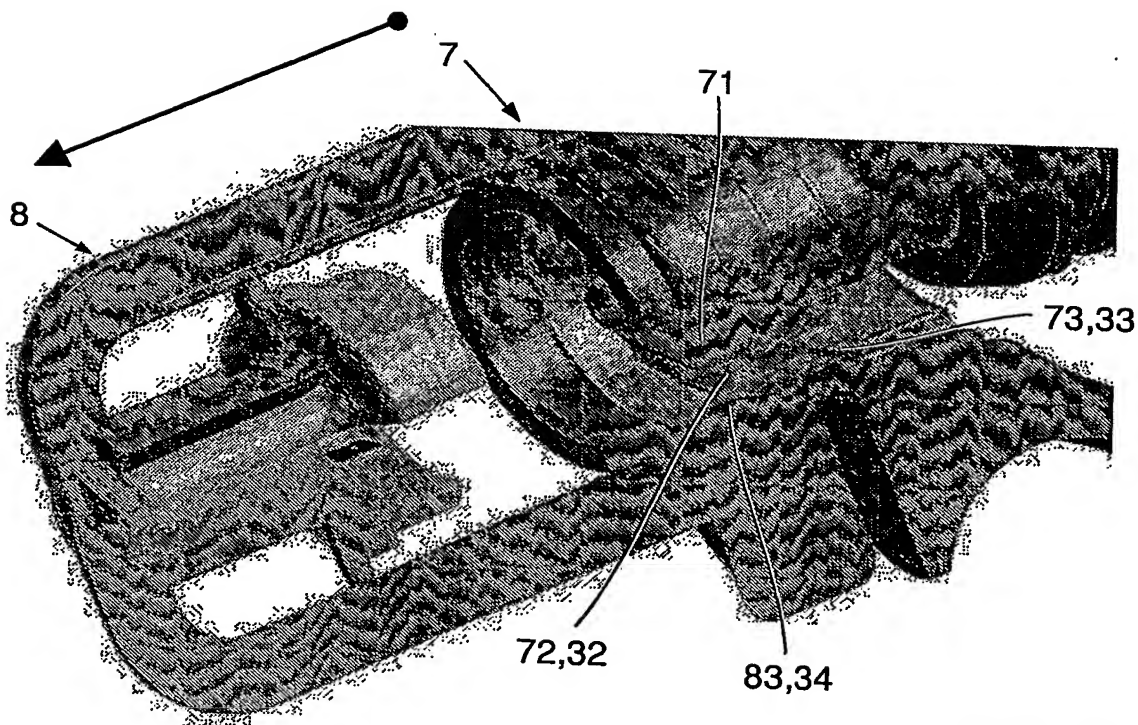


FIG. 3b

4/4

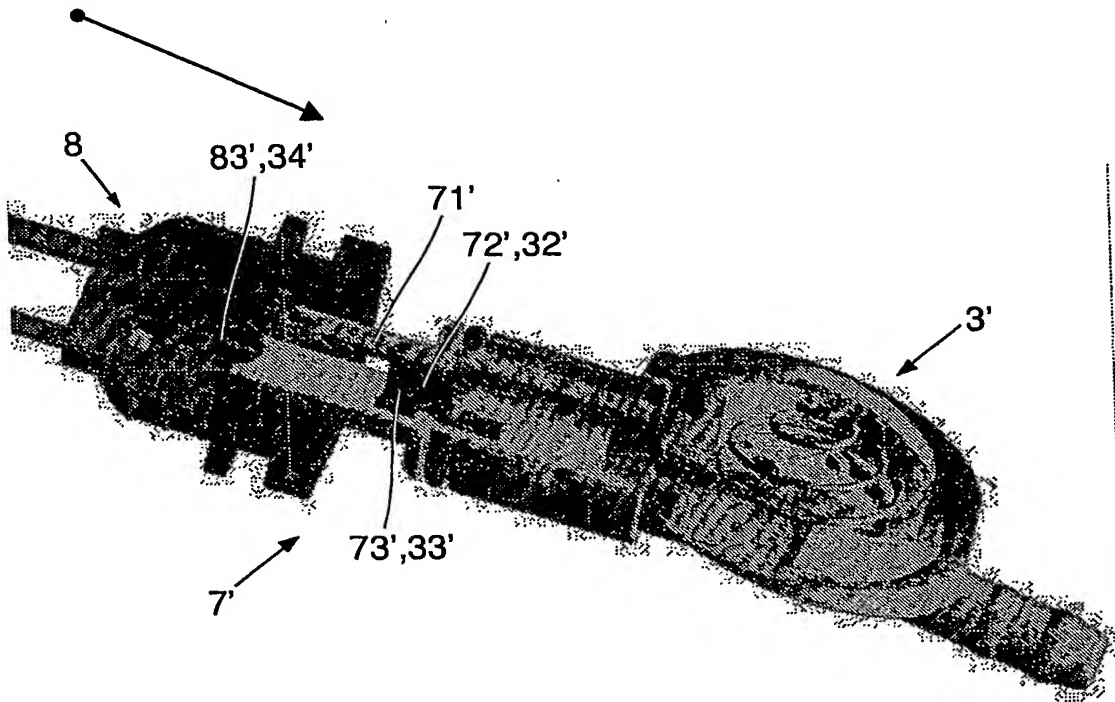


FIG. 4a

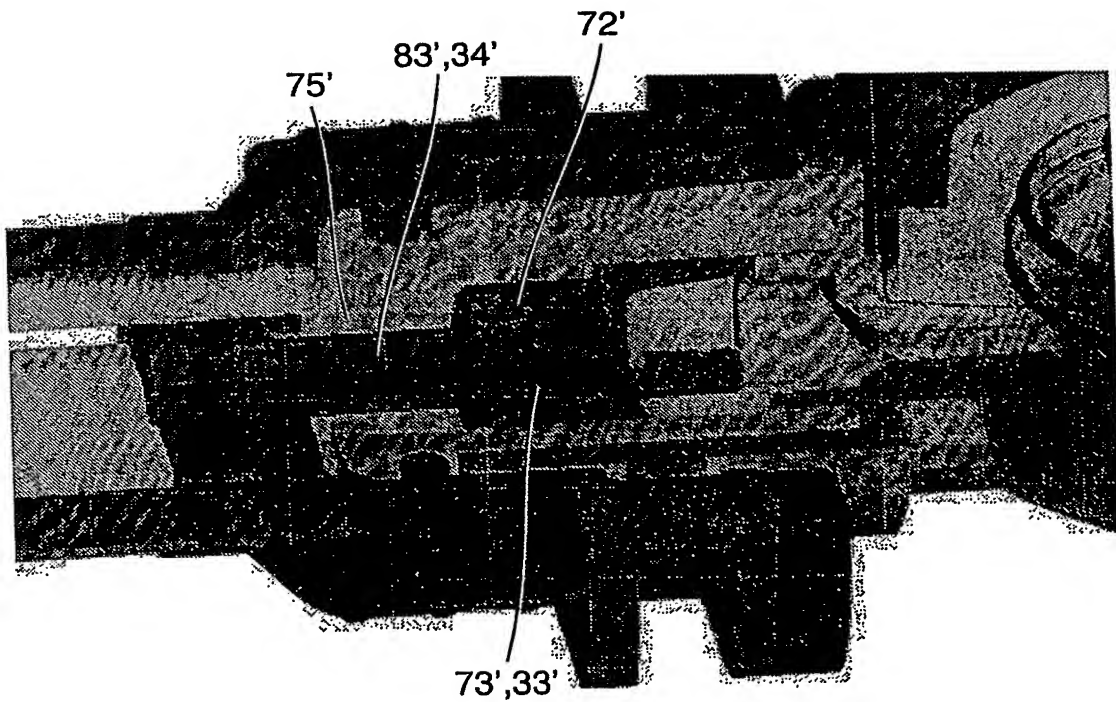


FIG. 4b